


Splice-Boxes partly equipped, Telescope

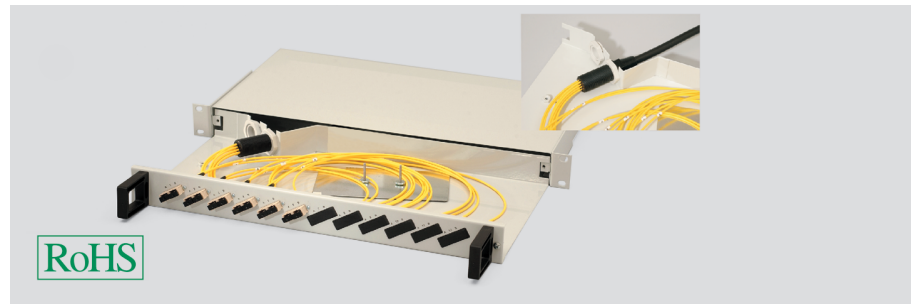

Type

19" splice boxes, telescope partially configured with couplings MM

Cage

Housing material:
Cover lock:
Colour:

Steel sheet
Fastening by means of screws
Grey similar to RAL 7035

Equipment

Partially-configured
Couplers

Dimensions

Number of height modules (HM):
Fastening dimensions:
Width:

1
19"
225 mm

Preferred types

Part no.	Number of couplers	Type of coupler	Unit
801171	4	ST	1
801172	8	ST	1
801173	12	ST	1
801174	24	ST	1
801168	2	SC duplex	1
801169	4	SC duplex	1
801170	6	SC duplex	1
80996	12	SC duplex	1
803157	2	LCdx	1
803158	4	LCdx	1
803159	6	LCdx	1
803160	12	LCdx	1

Dimensions and specifications may be changed without prior notice.

Options

On request, different assembly variations, such as F-SMA, FC/PC, and DIN and/or diagonal cross section designs, are also available.

Application

Glass fibre splice boxes are used as cable end enclosures for multi-core fibreoptic cables in 19" cabinets. The splice boxes described here are particularly suitable as a connecting unit for our pre-fabricated fibre-optic grooved cables.