Patch-Panels RJ45 unscreened

RoHS
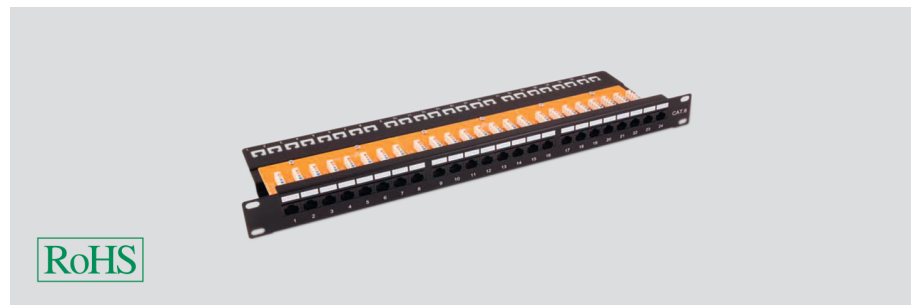
Type	**Patch-Panel unscreened class E 24P**
Configuration	
Housing material:	Steel plate, solid
Colour:	Black similar to RAL 9005
Board:	3x8 mother board, colour and number-coded
Push-on connector type:	RJ45(8/8)
Number of bushes:	24
Type of screen:	no
Strain relief:	by means of cable straps
Connecting system	
Connection type:	LSA plus - insulation piercing connections
Suitable for cable diameter:	0.4 - 0.64mm (AWG 26 - 22)
Insulation diameter, min.:	0,7 - 1,7 mm (PE)
Assignment type	EIA/TIA 568 A + EIA/TIA 568 B
Dimension	
Width:	440 mm
Depth:	110 mm
Number of height modules (HM):	1
Fastening dimensions:	19"
Norms and standards	HELUKAT® CONNECTING SYSTEMS® unscreened system component up to 250 MHz of category 6 / Class E in accordance with ISO 11801, EN 50173.
Application	As floor distributor in applications of digital and analog image, data and voice transmission.
Part no.	**802908**
	Dimensions and specifications may be changed without prior notice.
Packing unit	**1**

HELUKABEL®