


SK-D heat shrink 3:1 - with interior adhesive

polyolefine - thick walled

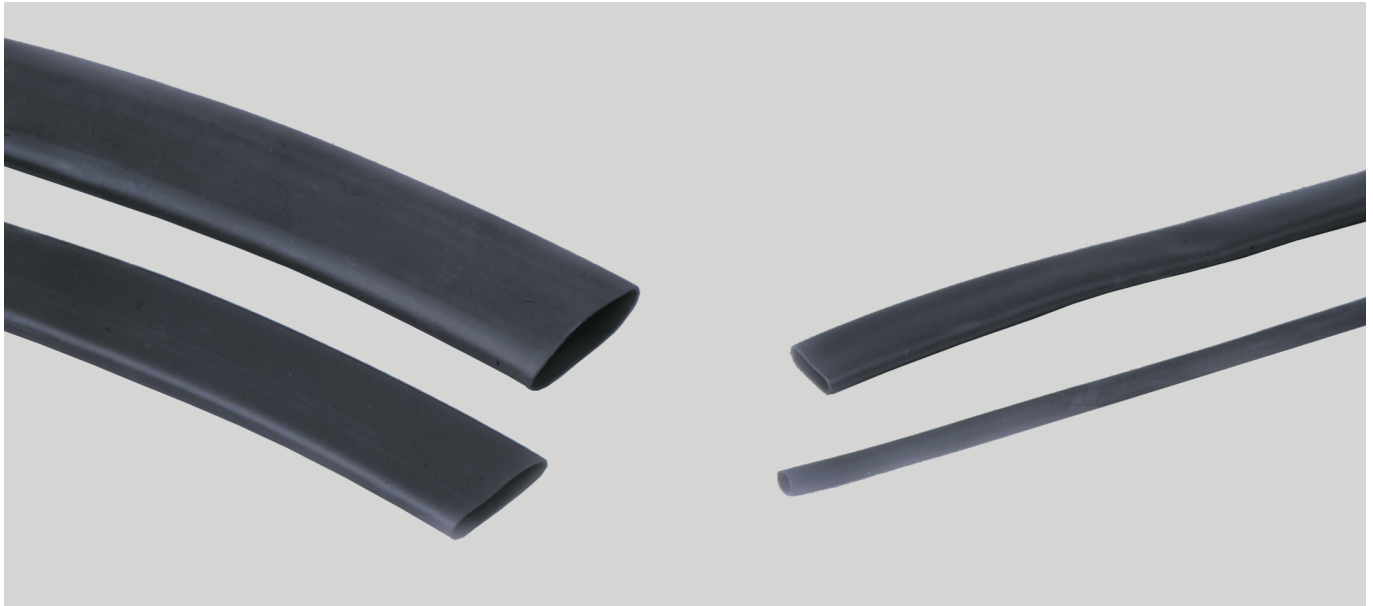

SK-D

Polyolefine shrunk tube with internal adhesive for repairing insulation and sealing electrical components.

For the protection of cable sleeves and terminations for low-voltage applications (600V).

Good protection against impact and abrasion.

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Installation technology
- Control cabinet construction

Material

PO (Polyolefine) with internal adhesive

Colour: black

- halogen-free

Note

Form of shipment:

1.2 m rods

Approval:

UR-listed up to size 68,1 mm

Technical data

Temperature range: -55°C up to +110°C

black

Part no.	Inner Ø before shrinkage mm	Wall thickness mm	Inner Ø after shrinkage mm	Content m	Unit	Net EUR/ 100 items at a purchase of		
						up to 5	6 - 10	11 - 20
905344	8,9	1,8	3,0	rods of 1,22m	1	o. r.	o. r.	o. r.
905335	13,0	2,4	4,1	rods of 1,22m	1	o. r.	o. r.	o. r.
905336	19,1	2,4	6,1	rods of 1,22m	1	o. r.	o. r.	o. r.
905337	27,9	3,0	8,9	rods of 1,22m	1	o. r.	o. r.	o. r.
905338	38,1	4,1	11,9	rods of 1,22m	1	o. r.	o. r.	o. r.
905339	50,8	4,1	16,0	rods of 1,22m	1	o. r.	o. r.	o. r.
905340	68,1	4,1	22,1	rods of 1,22m	1	o. r.	o. r.	o. r.
905731	89,9	4,1	30,0	rods of 1,22m	1	o. r.	o. r.	o. r.
905732	119,9	2,0	39,9	rods of 1,22m	1	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request