


SCH heat-shrink tubing 2:1

PVC

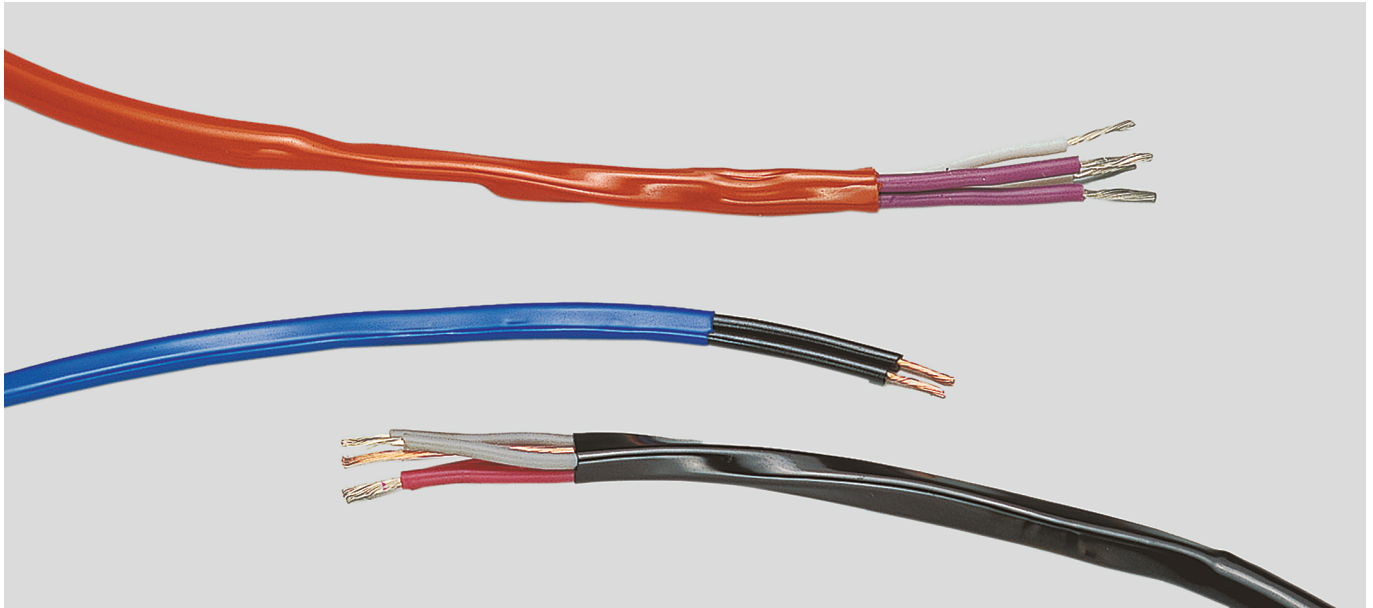

SCH

PVC shrunk tube for repairing insulation and sealing electrical components.

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Installation technology
- Control cabinet construction

Material

PVC

Colour: black

Flammability acc. to UL 94: V0

- silicone-free

Note

Attention: Do not store tubes at over 18°C!
Otherwise properties are changed!
Length shrinkage approx. 20-30%
The colours orange, yellow, white, blue, green, brown, red on request.

Technical data

Temperature range: -20°C up to +90°C

black

Part no.	Inner Ø before shrinkage mm	Wall thickness mm	Inner Ø after shrinkage mm	Content m	Net EUR/100 metres at a purchase of		
					up to 100	101 - 500	501 - 1000
91300	2,5	0,2	1,2	100,0	o. r.	o. r.	o. r.
91301	4,0	0,25	2,0	100,0	o. r.	o. r.	o. r.
91302	6,0	0,25	3,0	100,0	o. r.	o. r.	o. r.
91303	7,0	0,25	4,0	100,0	o. r.	o. r.	o. r.
91304	11,0	0,3	6,0	100,0	o. r.	o. r.	o. r.
91305	14,0	0,3	8,0	100,0	o. r.	o. r.	o. r.
91306	17,0	0,4	10,0	100,0	o. r.	o. r.	o. r.
91307	20,0	0,5	13,0	100,0	o. r.	o. r.	o. r.
91308	25,0	0,5	16,0	50,0	o. r.	o. r.	o. r.
91309	31,0	0,5	20,0	50,0	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request