


TC mounting base

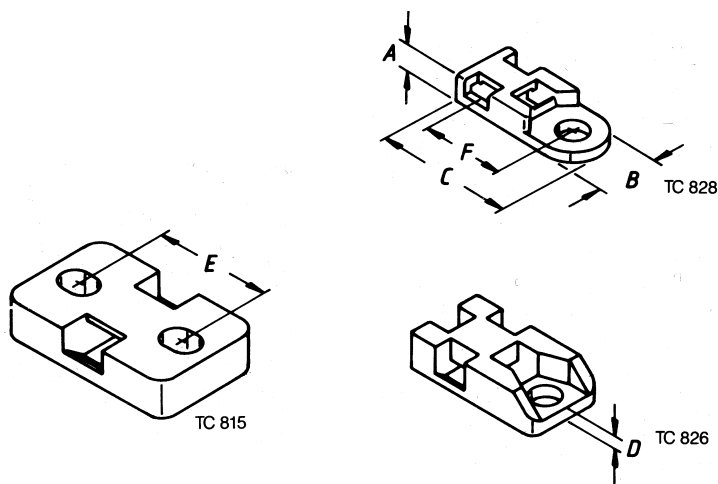

TC as screw base

Mounting base for bolting or riveting. Cable binder can be inserted from 4 sides.

Material

Polyamide 6.6
Colour: transparent

Technical data

Temperature range: -40°C up to +85°C
Temperature range temporary up to +105°C

as screwing socket

Part no.	Type	Fixing	A mm	B mm	C mm	D mm	E mm	F mm	Boring mm	Tie width max. mm	Unit	Net EUR/ 100 items at a purchase of		
												up to 1000	1001 - 5000	5001 - 10000
93007	TC 815	Screw-in	6,4	19,1	31,2	-	19,9	-	5,3	7,6	500	o. r.	o. r.	o. r.
93044	TC 826	Screw-in	5,7	12,7	23,8	-	-	-	4,4	4,8	1000	o. r.	o. r.	o. r.
93045	TC 828	Screw-in	3,8	10,1	22,5	-	-	-	4,3	4,8	1000	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request