


HTP wrapping tape

high temperature protection

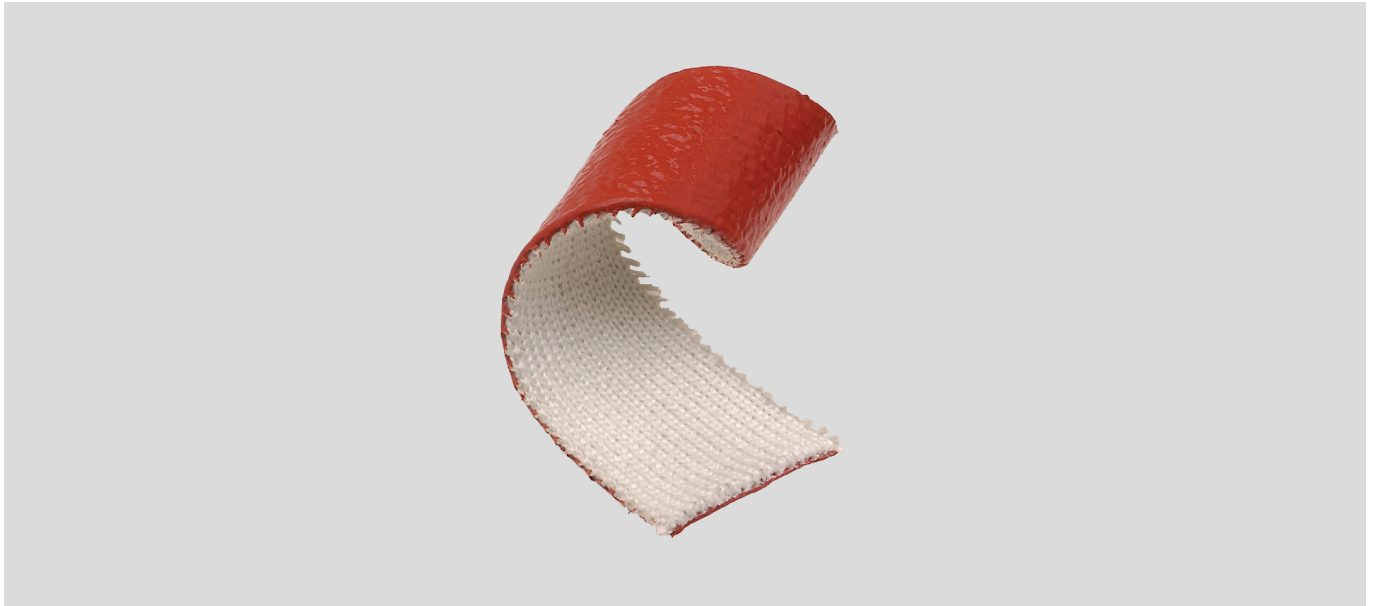

HTP

This product is extremely heat resistant. HTP has a high insulation factor and, due to the iron oxide containing silicone sheath, is resistant to small quantities of liquid steel. HTP also protects against burn injuries from steam tubes, hot air or hot water lines.

Material

Interior sheath of knitted glass-fibre braid
Silicone sheath (contains iron oxide)
Colour: orange

Technical data

Permanent load: +260°C
Short-time load: +1090°C
(up to approx. 20 minutes)
Loading moment: +1640°C
(approx. 15-30 seconds)

Wrapping tape

Part no. Cable wrap version	Inner Ø mm	Width mm	Per metres	Net EUR/100 metres at a purchase of		
				up to 100	101 - 500	501 - 1000
94721	-	25,0	15,0	o. r.	o. r.	o. r.
94722	-	51,0	15,0	o. r.	o. r.	o. r.
94723	-	76,0	15,0	o. r.	o. r.	o. r.
94724	-	102,0	15,0	o. r.	o. r.	o. r.
94758	-	127,0	15,0	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request