


SI insulating tube

silicone

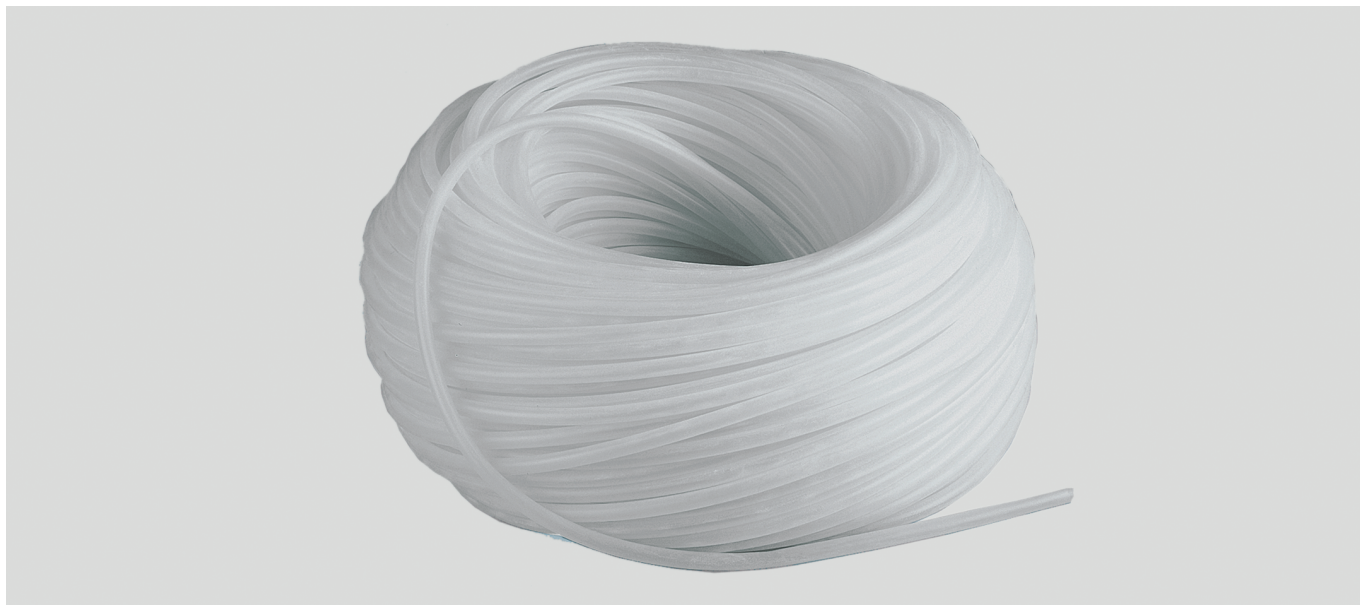

SI
Silicone insulating tube for insulating and bundling wires and lines.

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Installation technology
- Control cabinet construction

Properties

Softener and heavy metal free, physiologically and toxicologically safe with good chemical resistance.

Technical data

DIN 40628

Temperature range: -50°C up to +180°C

| Part no. | Inner Ø mm | Wall thickness mm | Per metres | Net EUR/100 metres at a purchase of | | |
|----------|---------------|-------------------------|---------------|-------------------------------------|-----------|------------|
| | | | | up to 100 | 101 - 500 | 501 - 1000 |
| 94741 | 1,0 | 0,4 | 100,0 | o. r. | o. r. | o. r. |
| 94742 | 2,0 | 0,4 | 100,0 | o. r. | o. r. | o. r. |
| 97203 | 3,0 | 0,4 | 100,0 | o. r. | o. r. | o. r. |
| 97426 | 4,0 | 0,5 | 100,0 | o. r. | o. r. | o. r. |
| 97427 | 5,0 | 0,6 | 100,0 | o. r. | o. r. | o. r. |
| 97757 | 6,0 | 0,6 | 100,0 | o. r. | o. r. | o. r. |
| 94743 | 8,0 | 0,7 | 100,0 | o. r. | o. r. | o. r. |
| 94744 | 10,0 | 0,7 | 50,0 | o. r. | o. r. | o. r. |
| 94745 | 12,0 | 0,8 | 50,0 | o. r. | o. r. | o. r. |
| 94746 | 14,0 | 0,8 | 50,0 | o. r. | o. r. | o. r. |
| 94747 | 16,0 | 0,8 | 50,0 | o. r. | o. r. | o. r. |

Dimensions and specifications may be changed without prior notice.

o. r. = on request