


SR assembly rod

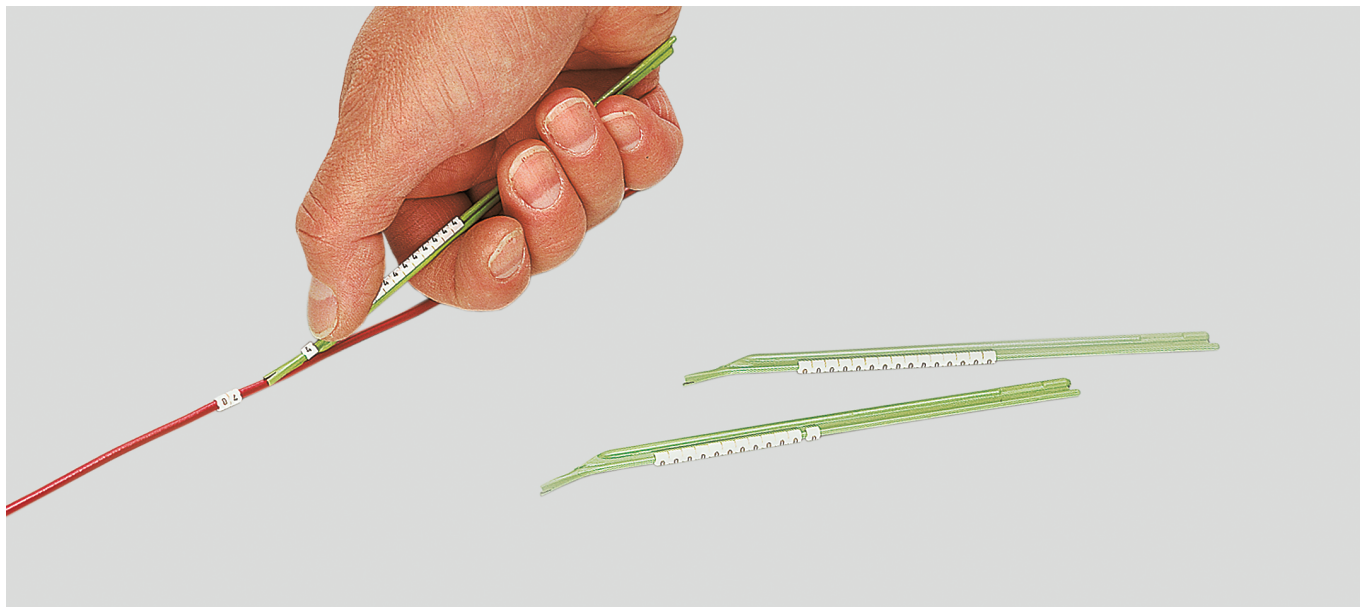

SR assembly rods

Simple handling afforded by marking rods characterise these marking rings. The nozzle-shaped marking rod is forced onto the line and the snap-on sleeve pushed with the thumb. The marker sits tight on the line without slip.

Material

Copolymer
 • halogen-free

Technical data

Temperature range: -40°C up to +105°C

Part no.	Colour with inscription	Type	Cross section from - to mm ²	Cable Ø from - to mm	Stick colour	Unit	Net EUR/100 unit at a purchase of		
							1	2 - 5	6 - 10
95697	-	Assembly rod for SR 15	10 - 16	5,8 - 8,5	orange	5	o. r.	o. r.	o. r.
95797	-	Assembly rod for SR 17	16 - 25	8,5 - 11,5	orange	5	o. r.	o. r.	o. r.
99821	-	Assembly rod for SR 21	25 - 70	11,5 - 15,5	grey	2	o. r.	o. r.	o. r.
99822	-	Assembly rod for SR 24	70 - 100	15 - 19	grey	2	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request