


# SVRO heat shrink 2:1 - high resistant

FKM

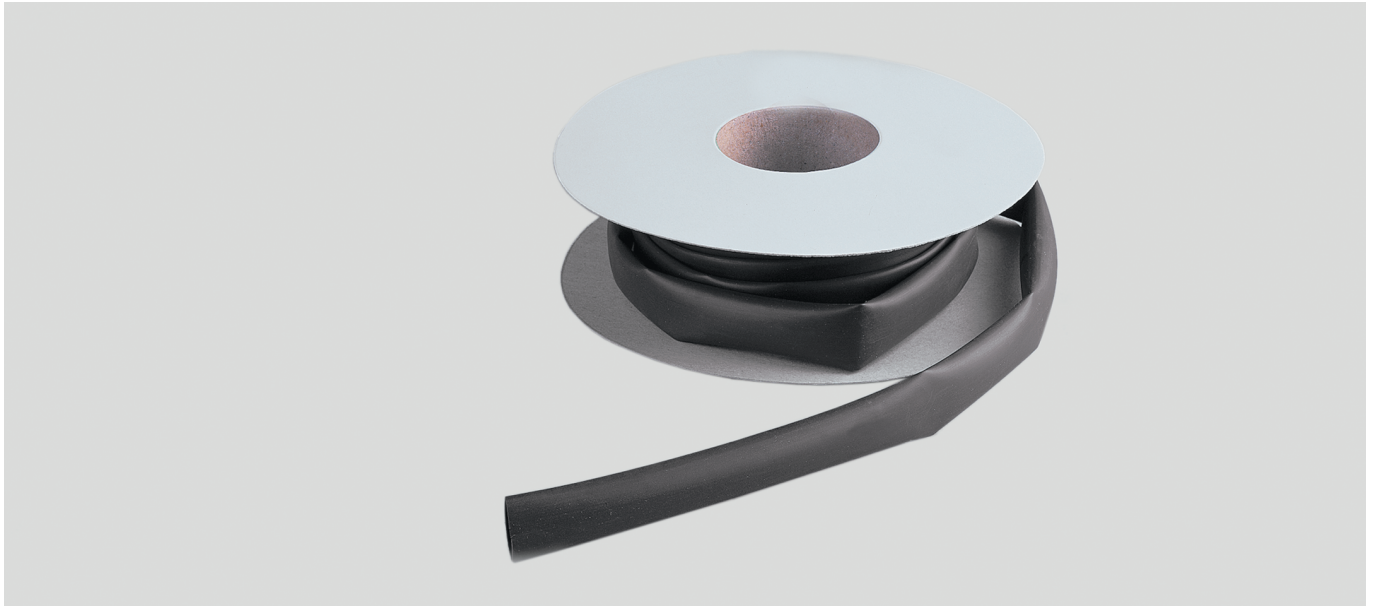

## SVRO

FKM shrunk tube to protect against aggressive media.

## Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Installation technology
- Control cabinet construction

## Material

FKM

Colour: black

## Properties

Weather, flame and chemical resistant

## Note

MIL-I-23053

## Technical data

Temperature range: -55°C up to +220°C

## black

Part no.	Inner Ø before shrinkage mm	Wall thickness mm	Inner Ø after shrinkage mm	Content m	Unit	Net EUR/100 metres at a purchase of		
						up to 100	101 - 500	501 - 1000
96796	3,2	0,8	1,6	50,0	-	o. r.	o. r.	o. r.
97385	4,8	0,9	2,4	50,0	-	o. r.	o. r.	o. r.
97774	6,4	0,9	3,2	50,0	-	o. r.	o. r.	o. r.
91165	9,5	1,0	4,8	50,0	-	o. r.	o. r.	o. r.
91166	12,7	1,2	6,4	30,0	-	o. r.	o. r.	o. r.
93690	19,0	1,4	9,5	30,0	-	o. r.	o. r.	o. r.
93691	25,4	1,8	12,7	30,0	-	o. r.	o. r.	o. r.
93692	38,0	2,4	19,0	15,0	-	o. r.	o. r.	o. r.
93693	50,8	2,8	25,4	15,0	-	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request