


SK heat-shrink 3:1 - with interior adhesive

polyolefine - thin - walled

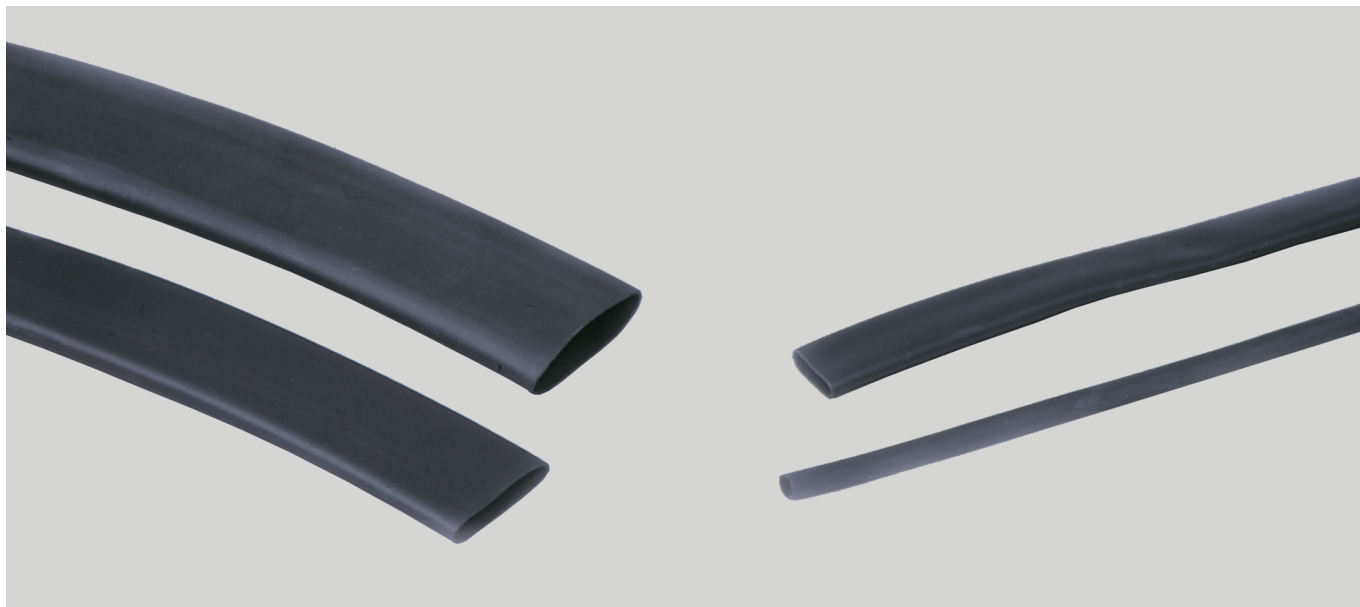

SK

Polyolefine shrunk tube with internal adhesive for repairing insulation and sealing electrical components.

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Installation technology
- Control cabinet construction

Material

PO (Polyolefine) with internal adhesive

Colour: black

Note

Form of shipment:
Box

Technical data

Temperature range: -55°C up to +110°C

black

Part no.	Inner Ø before shrinkage mm	Wall thickness mm	Inner Ø after shrinkage mm	Content m	Unit	Net EUR/item at a purchase of		
						up to 5	6 - 10	11 - 20
98258	3,2	1,0	1,0	5,0	1	o. r.	o. r.	o. r.
98259	6,4	1,0	2,0	3,5	1	o. r.	o. r.	o. r.
98260	9,5	1,5	3,2	3,0	1	o. r.	o. r.	o. r.
98261	12,7	1,8	4,1	2,5	1	o. r.	o. r.	o. r.
98262	19,1	1,8	6,4	2,0	1	o. r.	o. r.	o. r.
98263	25,4	2,5	8,1	1,5	1	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request