


HFS heat-shrink 2:1 - halogen free

polyolefine

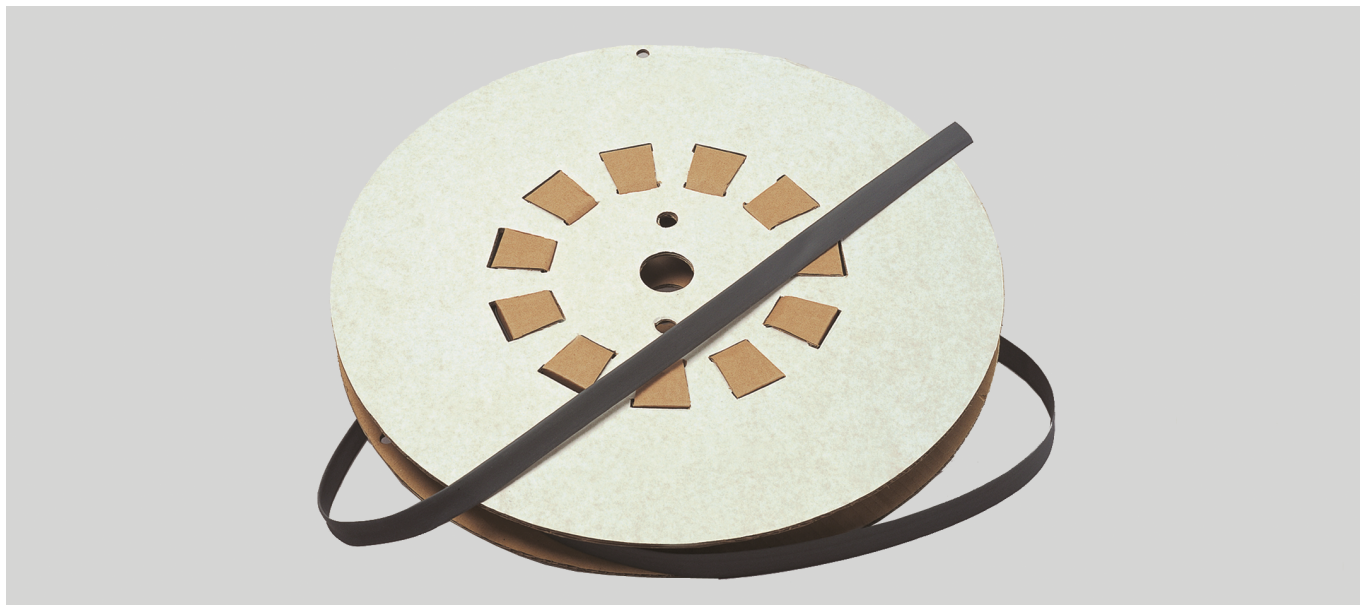

HFS rolls

Halogen-free polyolefyny shrunk tube for repairing insulation and sealing electrical components.

Application

- Plant and machine construction
- Automation technology
- Installation technology
- Controll cabinet construction

Material

PO (Polyolefine)

Colour: black

- halogen-free

Technical data

Temperature range: -55°C up to +105°C

black

Part no.	Inner Ø before shrinkage mm	Wall thickness mm	Inner Ø after shrinkage mm	Content m	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
99551	1,6	0,45	0,8	150,0	-	o. r.	o. r.	o. r.
99552	2,4	0,51	1,2	150,0	-	o. r.	o. r.	o. r.
99553	3,2	0,51	1,6	150,0	-	o. r.	o. r.	o. r.
99554	4,8	0,51	2,4	75,0	-	o. r.	o. r.	o. r.
99555	6,4	0,64	3,2	75,0	-	o. r.	o. r.	o. r.
99556	9,5	0,64	4,8	75,0	-	o. r.	o. r.	o. r.
99557	12,7	0,64	6,4	50,0	-	o. r.	o. r.	o. r.
99558	16,0	0,64	8,0	50,0	-	o. r.	o. r.	o. r.
99559	19,0	0,76	9,5	30,0	-	o. r.	o. r.	o. r.
99560	25,4	0,89	12,7	30,0	-	o. r.	o. r.	o. r.
99561	32,0	0,89	16,0	30,0	-	o. r.	o. r.	o. r.
99562	38,1	1,02	19,0	30,0	-	o. r.	o. r.	o. r.
99563	50,8	1,14	25,4	30,0	-	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request