


# TY-RAP® Detectable Cable Ties

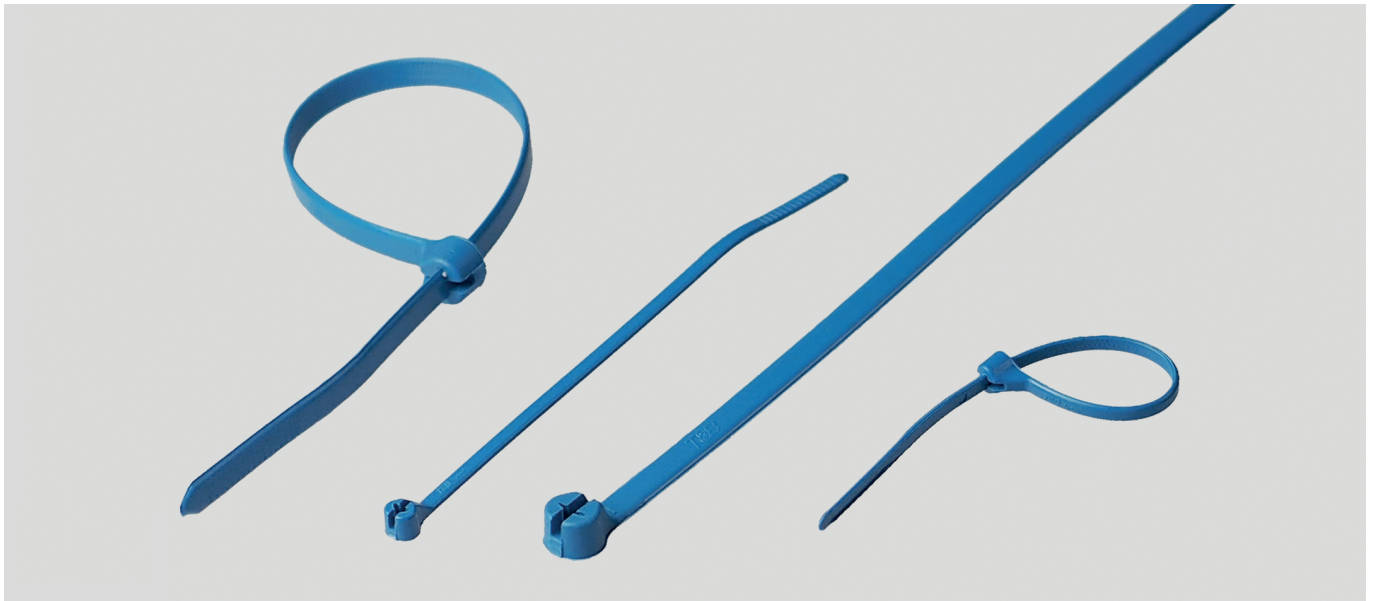

## TY-RAP® Detectable Cable Ties

- Detectable by metal detectors set at minimum 1.5mm diameter ferrous sphere
- Detectable by X-Ray equipment
- Bright blue colour for an easy visual detection
- Help achieve the HACCP EU-Directive, compliant to the FDA regulation
- For liquid-processing applications

## Material

- halogen-free

## Note

- Available versions:
- PA 6.6
  - Polypropylene

## Technical data

Temperature range: -40°C up to +85°C

Flammability acc. to UL 94: V2

### PA 6.6

Part no. blue	Type	Length mm	Width mm	Bundle Ø mm	Capacity N	Unit	Net EUR/100 items at a purchase of		
							up to 1000	1001 - 5000	5001 - 10000
908524	TY523M-NDT	92,0	2,4	16,0	80,0	100	o. r.	o. r.	o. r.
908525	TY524M-NDT	140,0	3,6	29,0	180,0	100	o. r.	o. r.	o. r.
908526	TY525M-NDT	186,0	4,8	45,0	220,0	100	o. r.	o. r.	o. r.
908527	TY528M-NDT	360,0	4,8	102,0	220,0	100	o. r.	o. r.	o. r.
908528	TY527M-NDT	340,0	7,0	90,0	540,0	50	o. r.	o. r.	o. r.

### Polypropylene

Part no. blue	Type	Length mm	Width mm	Bundle Ø mm	Capacity N	Unit	Net EUR/100 items at a purchase of		
							up to 1000	1001 - 5000	5001 - 10000
908529	TY523M-PDT	92,0	2,4	16,0	80,0	100	o. r.	o. r.	o. r.
908530	TY525M-PDT	186,0	4,8	45,0	130,0	100	o. r.	o. r.	o. r.
908531	TY528M-PDT	360,0	4,8	102,0	130,0	100	o. r.	o. r.	o. r.
908532	TY527M-PDT	340,0	7,0	90,0	270,0	50	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request