


TYZ cable tie with steel lug lock

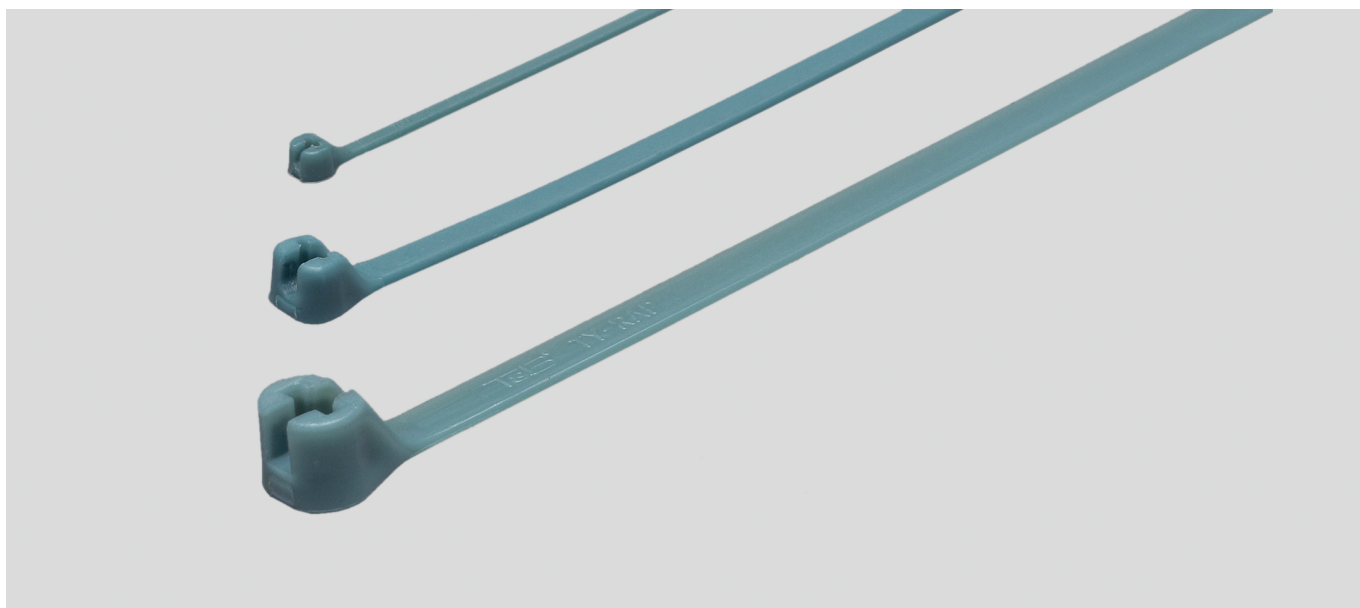

TY-RAP®

Cable tie with steel lug lock made of corrosion-resistant, non-magnetic steel. This technology enables the tie to offer excellent binding properties even under the most rigorous conditions such as heat, cold, humidity etc. and makes it insensitive to vibrations and external influences.

Material

ETFE Fluoropolymer
UV-resistant

- halogen-free
- silicone-free

Technical data

Temperature range: -60°C up to +170°C

Flammability acc. to UL 94: V0

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

high resistant

Part no.	Type	Colour	Length mm	Width mm	Bundle Ø mm	Capacity N	Unit	Net EUR/100 items at a purchase of		
								up to 1000	1001 - 5000	5001 - 10000
96909	TYZ 23M	aquamarine	92,0	2,4	16,0	80,0	1000	o. r.	o. r.	o. r.
96290	TYZ 25M	aquamarine	186,0	4,8	45,0	220,0	1000	o. r.	o. r.	o. r.
96724	TYZ 28M	aquamarine	360,0	4,8	102,0	220,0	500	o. r.	o. r.	o. r.
94800	TYZ 27M	aquamarine	340,0	7,0	90,0	540,0	100	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request